


# HYDROTECH ROUND LED

## Product Characteristics

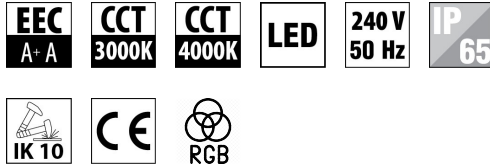

## Beskrivning

Round wall mounted luminaire for outdoor installation on a façade/wall, with light distribution downward only. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body,

tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 220-240V 50-60Hz

- Material: high corrosion resistance die-cast copper-free aluminum body
- Coating: polyester powder coating with phosphochromating pre-finish
- NR. 5 CREE "XP-L" LED down.
- Electronic transformer 220/240V 50/60Hz included
- Stainless steel screws.
- Silicone rubber gasket.
- Tempered safety glass.
- M20 rubber grommet Rutaseal® in EPDM
- Adjustable +/- 15 degrees.

## Ljusfördelning

ART	W	LM	IP	KELVIN	OPTION	DIMENSION
401012	8	750	IP65	3000K/4000k	10°, 30°, 45°	238X140 MM
401017	14	1200	IP65	3000K/4000k	10°, 30°, 45°	238X140 MM

